


Product Data Sheet Type: **AK352/15/SE**

Group: HEATSINKS Board Level

For single mounting

Width :	20 mm
Height :	15 mm
Length :	15 mm
Minimum thermal resistance :	28 K/W
For device :	TO 218 TOP 3
Device mounted by :	Screw
Heatsink mounted by :	Srew-On
Surface :	Black Anodised
Material :	AlMgSi0,5

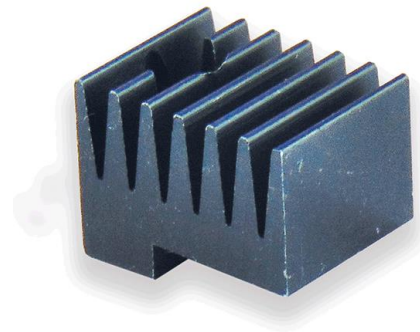

Top-mounted and contact pressure heat sinks for optimised contact pressure and additional cooling

- Reduced contact thermal resistance (R_{thGK}) to the primary heat sink and avoidance of 'hot spots' by means of full-surface contact pressure
- Reduced overall thermal resistance (R_{th}) via additional heat carry-off
- R_{thK} -values obtained for „stand-alone“ – application
- For individual M 2,5 / M 3 screwed assembly as standard
- Special dimensions, e.g. for multiple assembly, on request
- from AlMgSi 0,5 F22, black anodized
- for cases TO-220

