



## Product features PR 119

Width [mm]:	42.5
Height [mm]:	54.0
Alloy	AlMgSi 0,5 F22
Weight per meter [kg/m]:	1.95
Mounting clips	<a href="#">MC 725</a> ; <a href="#">MC 726</a> ; <a href="#">MC 773</a> ; <a href="#">MC 797</a>

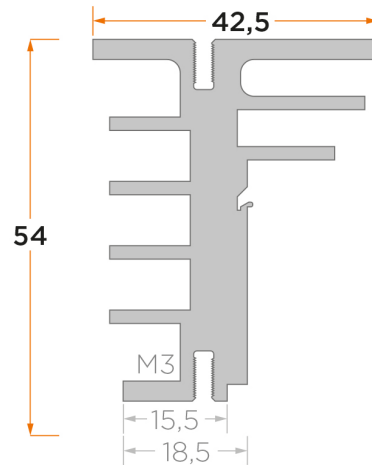

## Further information

Extruded heat sink profile for clip mounting with clip types: MC725, MC 726, MC 773, MC 797 Surface: AL= Untreated aluminium, SE= anodised black, NE= anodised colourless, CR Chromated- colourless (Chrom6-free, RoHS conform) Alloy: AlMgSi 0,5 F22 Standard tolerances (if not otherwise required): Extrusion tolerances for aluminium profiles: DIN 1748 - section 4 and DIN 17615 - section 3 respectively. DIN ISO 755 - 9 and DIN ISO 12020 - 2 respectively. Machining tolerance: DIN 2768 m Finishing to your specification Length, milling, surface refinement, including mounting-, insulation-, thermal interface accessories

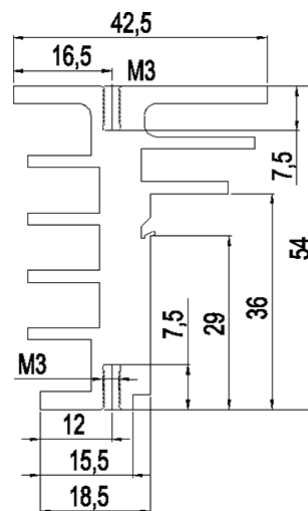

# Thermal performance

PV [W]	RthK [K/W]			
5.0	7.5	6.6	5.6	4.8
10.0	6.4	5.6	4.8	4.3
15.0	5.8	5.2	4.5	3.9
20.0		4.8	4.2	3.6
25.0			3.8	3.3
Length in mm	37.5	50.0	75.0	100.0

