


Product features PR 36

Width [mm]:	34.5
Height [mm]:	12.7
Base height [mm]:	3.0
Alloy	AlMgSi 0,5 F22
Weight per meter [kg/m]:	0.83

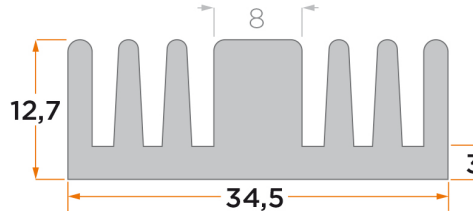

Further information

Extruded heat sink profile for screw-on mounting Surface: AL= Untreated aluminium, SE= anodised black, NE= anodised colourless, CR Chromated- colourless (Chrom6-free, RoHS conform) Alloy: AlMgSi 0,5 F22 Standard tolerances (if not otherwise required): Extrusion tolerances for aluminium profiles: DIN 1748 – section 4 and DIN 17615 – section 3 respectively. DIN ISO 755 – 9 and DIN ISO 12020 – 2 respectively. Machining tolerance: DIN 2768 m Finishing to your specification Length, milling, surface refinement, including mounting-, insulation-, thermal interface accessories

Thermal performance

PV [W]	RthK [K/W]			
4.0	8.8	7.5	6.3	5.5
8.0	6.9	6.0	5.1	4.5
12.0	6	5.3	4.6	4.0
16.0	5.5	4.8	4.1	3.6
20.0		4.5	3.8	3.2
Length in mm	37.5	50.0	75.0	100.0

